BATTERY DATA SHEET









MF | MAINTENANCE FREE

REF BTX7L-BS





- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM


FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold


12v VOLTAGE - v 100A CCA - A 6.3Ah CAPACITY - Ah (20Hr) 6Ah CAPACITY - AN (10Hr)

DIMENSIONS

Length (A): Width (B): Container height: Total height (C): 113±2mm 70±2mm 130±2mm 130±2mm

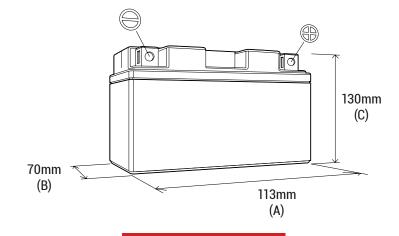

TERMINALS



UPGRADE FOR

WEIGHT

Battery (with acid):

Approx 2.48kg

MOUNTING ANGLE

